

Network Video Recorder

DEN302E Series



Key Features

8/16/32-channel input

Third-party IP cameras supported with ONVIF conformance

HDMI and VGA output up to 1080P

Up to 4 Megapixels resolution recording

Accurate retrieval, instant playback

2 SATA HDD up to 12 TB


Support for P2P, UPnP, NTP, DHCP, PPPoE

Support for mobile client access

Specifications

		DEN302-16E	DEN302-32E
Video and Audio			
IP Video Input		16-ch	32-ch
Two-way audio Input			
Network			
Incoming bandwidth		160Mbps	200Mbps
Outgoing bandwidth	96Mbps		
Remote connection	128		
Video/Audio Output			
HDMI/VGA Output	HDMI/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz		
Recording Resolution	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Audio Output	1-ch, RCA		
Synchronous Playback		16-ch	
Decoding			
Compression	H.264		
Live view/Playback	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Capability		4x 4MP@20, 6 x 1080p@25, 16 x 720p@25, 32 x D1	
Hard Disk			
SATA	2 SATA interfaces		
Capacity	up to 6TB for each disk		
External Interface			
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface		
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0		
General			
Power Supply	12V DC		
Consumption (without HDD)	≤ 8 W		
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)		
Working Humidity	10% ~ 90%		
Dimensions	44 × 360 × 254mm (1.7" × 14.2" × 10.0")		
Weight (without HDD)	≤ 1.42 Kg (3.13 lb)		

Dimensions

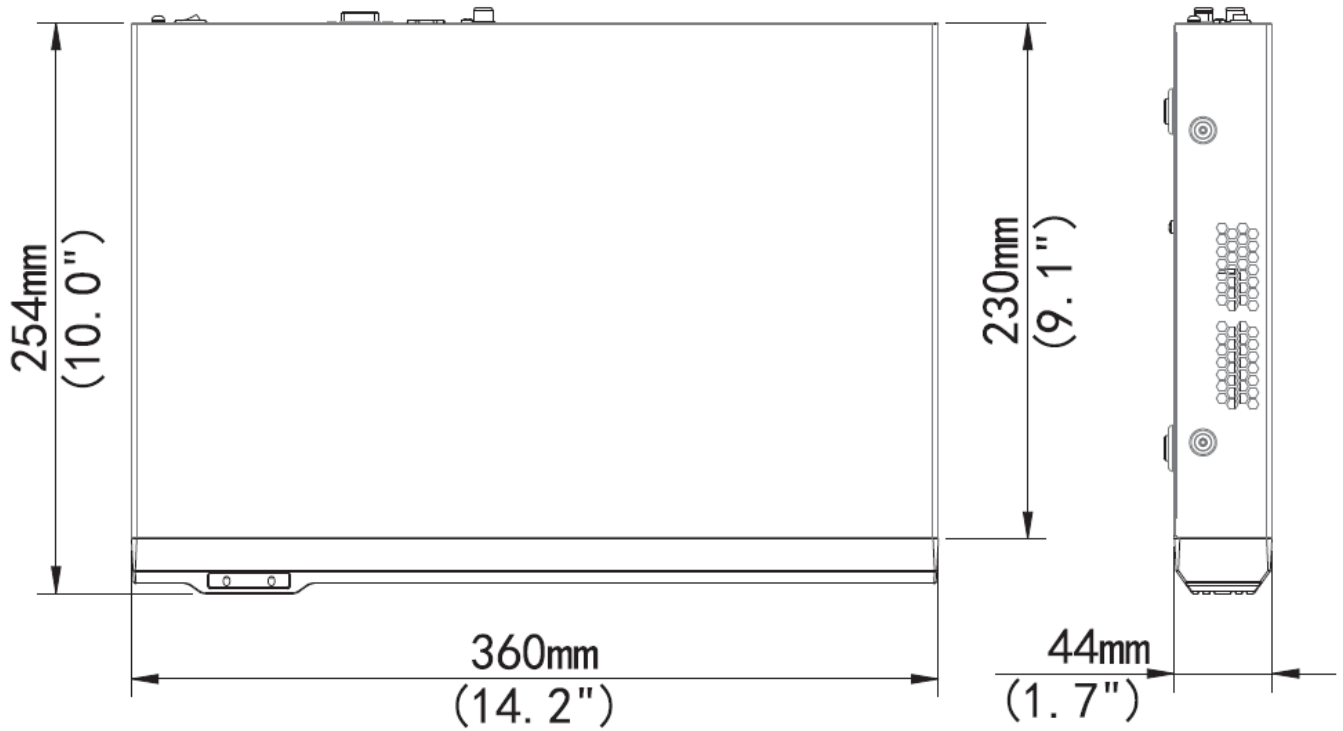

Rear Panel

